

Geocasting in Mobile Ad Hoc Networks: Location-Based Multicast Algorithms *

Young-Bae Ko and Nitin H. Vaidya
Department of Computer Science
Texas A&M University
College Station, TX 77843-3112, USA
{youngbae,vaidya}@cs.tamu.edu

Abstract

This paper addresses the problem of geocasting in mobile ad hoc network (MANET) environments. Geocasting is a variant of the conventional multicasting problem. For multicasting, conventional protocols define a multicast group as a collection of hosts which register to a multicast group address. However, for geocasting, the group consists of the set of all nodes within a specified geographical region. Hosts within the specified region at a given time form the geocast group at that time. We present two different algorithms for delivering packets to such a group, and present simulation results.

1 Introduction

When an application must send the same information to more than one destination, multicasting is often used, because it is much more advantageous than multiple unicasts in terms of the communication costs. Cost considerations are all the more important for a mobile ad hoc network (MANET) consisting of mobile hosts that communicate with each other over wireless links, in the absence of a fixed infrastructure [2]. In MANET environments, the multicast problem is more complex because topology change of the network is extremely dynamic and relatively unpredictable.

To do multicasting, some way is needed to define multicast groups. In conventional multicasting algorithms, a multicast group is considered as a collection of hosts which register to that group. It means that, if a host wants to receive a multicast message, it has to join a particular group first. When any hosts want to send a message to such a group, they simply multicast it to the address of that group. All the group members then receive the message.

In this paper, we consider a different approach, namely, geocasting. A geocast [13, 19] is delivered to the set of nodes within a specified geographical area. Unlike the traditional multicast schemes, here, the multicast group (or geocast group) is implicitly defined as the set of nodes within a specified area. We will refer to the specified area as the “multicast region”, and the set of nodes in the multicast region as the *location-based multicast group*.¹ If a host resides within the multicast region at a given time, it will automatically become a member of the corresponding multicast group at that time. A location-based multicast group may be used for sending a message that is likely to be of interest to everyone in a specified area.

In wireless ad hoc environments, two approaches can be used for multicasting: *multicast flooding* or *multicast tree-based approach*. Existing multicast protocols [5, 10, 11, 21], mainly based on the latter approach, may not work well in mobile ad hoc networks as dynamic movement of group members can cause the frequent tree reconfiguration with excessive channel overhead and loss of datagrams [7, 8]. Since the task of keeping the tree structure up-to-date in the multicast tree-based approach is nontrivial, sometimes, multicast flooding may be considered as an alternative approach for multicasting in MANET [20]. In this paper, we propose two *location-based multicast* schemes to decrease delivery overhead of geocasting packets, as compared to multicast flooding. The schemes in this paper attempt to reduce the forwarding space for multicast packets. Limiting the forwarding space results in fewer geocast messages, while maintaining “accuracy” of data delivery comparable with multicast flooding [16].

This paper is organized as follows. The next section discusses some related work. Section 3 describes proposed approach for location-based multicasting in MANET. Performance evaluation of our algorithms is presented in Section 4. In Section 5, several optimizations to our basic approach are suggested. Finally, Section 6 presents conclusions and

*Research reported is supported in part by Texas Advanced Technology Program grant 010115-248.

¹We use the terms *geocast* and *location-based multicast* interchangeably.

future work.

2 Related Work

Multicasting in mobile ad hoc networks is a relatively unexplored research area, when compared to the area of unicast routing for MANET [22]. However, recently, several protocols for multicasting in MANET environments have been proposed [8, 7, 14, 23]. Reference [8] adapts fixed network multicast approaches (PIM Sparse Mode) to the MANET and proposes the Shared-Tree Wireless Network Multicast (ST-WIM) protocol. Adhoc Multicast Routing (AMRoute) protocol [7] and Lightweight Adaptive Multicast (LAM) protocol [14] are some other protocols for MANET multicast routing. Both algorithms may be categorized as tree-based approaches, as a group-shared forwarding tree is created and maintained in LAM and user-multicast trees are exploited in AMRoute with dynamic cores. In the Ad Hoc Multicast Routing protocol utilizing Increasing id-numbers (AMRIS)[23], a shared delivery tree rooted at a special node is constructed and maintained.

The closest work to ours is GeoCast by Navas and Imielinski [13, 19]. In their scheme also, multicast group members are (implicitly) defined as all nodes within a certain region. To support location-dependent services such as geographically-targeted advertising, they suggested three methods: geo-routing with location aware routers, geo-multicasting modifying IP multicast, and an application layer solution using extended Domain Name Service (DNS). This paper considers geocasting in mobile ad hoc networks.

The algorithms proposed in this paper are based upon a multicast flooding approach and the basic idea of the algorithms is derived from protocols we previously proposed for routing in mobile ad hoc networks [15]. In [15], we presented an approach to utilize location information to improve performance of routing protocols in MANET. To decrease overhead of route discovery by limiting the search space for a desired route, the schemes use physical location information for mobile hosts, which may be obtained using the global positioning system (GPS) [1]. Similar ideas have been applied to develop *selective paging* for cellular PCS (Personal Communication Service) networks [3]. In selective paging, the system pages a selected subset of *cells* close to the last reported location of a mobile host. This allows the location tracking cost to be decreased.

Metricom is another example of packet radio systems using location information for the routing purpose [18]. In the Metricom network infrastructure, location of fixed base stations is determined using a GPS receiver at the time of installation. Metricom uses a geographically based routing scheme to deliver packets between base stations. A packet is forwarded one hop closer to its final destination by com-

paring the location of packet's destination with the location of the node currently holding the packet. Recently, another way of using location information for routing protocol has been proposed in [6]. Their protocol, named DREAM, maintains location information of each node in routing tables and sends data messages in a direction computed based on these routing (location) tables. To maintain the location table accurately, each node periodically broadcasts a control packet containing its own coordinates, with the frequency of dissemination computed as a function of the node's mobility and the distance separating two nodes (called the distance effect).

3 Location-Based Multicast Protocols

Two approaches may be used to implement location-based multicast:

- Maintain a multicast tree, such that all nodes within the multicast region at any time belong to the multicast tree. The tree would need to be updated whenever nodes enter or leave the multicast region.
- Do not maintain a multicast tree. In this case, the multicast may be performed using some sort of "flooding" scheme. As elaborated below, this is the approach taken in this paper.

3.1 Multicast Flooding

Flooding is probably the simplest multicast routing algorithm [12]. The flooding algorithm can be used to deliver packets to nodes within a location-based multicast group. The multicast flooding algorithm can be implemented as follows: Assume that a node S needs to send a packet to a specific multicast region, a circle in Figure 1. Node S broadcasts the multicast packet to all its neighbors² – hereafter, node S will be referred to as the *sender* and nodes D, F, and G as the *multicast group members* (note that in Figure 1 all nodes present in the specified multicast region are, by definition, multicast group members). A node, say B or C, on receiving the packet, compares the specified region's coordinates with its own location. (We assume that all hosts are able to determine their own location using GPS.) If the location of B is within the specified multicast region, node B will accept the packet. Node B will also broadcast the packet to its neighbors, if it has not received the packet previously (repeated reception of a packet is detected using sequence numbers). If node B is located outside the multicast region and the packet was not received previously, it just broadcasts the packet to its neighbors. In Figure 1, when

²Two nodes are said to be neighbors if they can communicate with each other over a wireless link.

node X receives the packet from B, it forwards the packet to its neighbors. However, when node X receives the same packet from C, node X simply discards the packet. Similarly, when node D receives a multicast packet from X, it forwards the packet to its neighbors after accepting the packet.

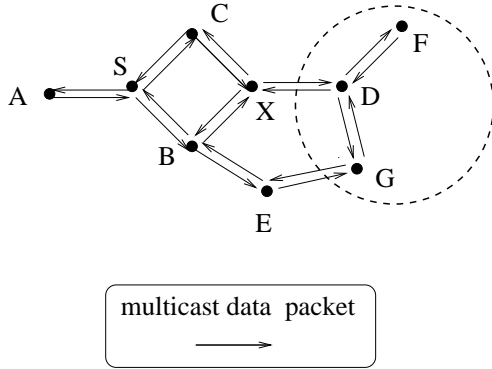


Figure 1. Illustration of multicast flooding

Using the above flooding algorithm, provided that the intended multicast group members are reachable from the sender, the members should eventually receive a multicast message. It is possible that some group members will not receive the packet (for instance, when they are unreachable from the sender, or multicast messages are lost due to transmission errors).

This algorithm would be very simple and robust but would not be very efficient. When using the above algorithm, observe that in the absence of transmission errors, the multicast packet would reach all nodes reachable from the sender S, not just the nodes in the multicast region. Using location information of the source and the specified multicast region, we attempt to reduce the number of nodes, outside the multicast region, to whom a multicast packet is propagated.

3.2 Preliminaries

Location Information

The proposed approach is termed *location-based multicast*, as it makes use of location-based multicast groups and utilizes location information to reduce multicast delivery overhead. Location information used in our protocol may be provided by the global positioning system (GPS) [1]. With the availability of GPS, it is possible for a mobile host to know its physical location³. (In this paper, we assume

³Current GPS provides accurate three-dimensional position (latitude, longitude, and altitude), velocity, and precise time traceable to Coordinated Universal Time(UTC) [1]

that the mobile nodes are moving in a two-dimensional plane.) In reality, position information provided by GPS includes some amount of *error*, which is the difference between GPS-calculated coordinates and the real coordinates. For instance, NAVSTAR Global Positioning System has positional accuracy of about 50-100 meters and Differential GPS offers accuracies of a few meters [1]. In our discussion, we assume that each host knows its current location *precisely* (i.e., no error). However, our algorithms can be easily extended to take location error into account, similar to the routing algorithms in [15].

Multicast Region and Forwarding Zone

Multicast Region: Consider a node S that needs to multicast a message to all nodes that are currently located within a certain geographical region. We call this specific area as “*Multicast Region*”. The multicast region would be represented by some closed polygon such as a circle or a rectangle (see Figure 2). Assume that node S multicasts a data packet at time t_0 , and three nodes (X, Y, and Z in Figure 2) are located within the multicast region at that time. Then, the multicast group, from the viewpoint of node S at time t_0 , would have three members that are expected to receive the multicast data packet sent by node S. Accuracy of multicast delivery can be defined as ratio of the number of group members that actually receive the multicast packet, and the number of group members which were in the multicast region at the time when the multicast is initiated. For example, if only node X among three members of the multicast group in Figure 2 actually gets a multicast packet, accuracy of delivery for the multicast packet will be 33.3%.

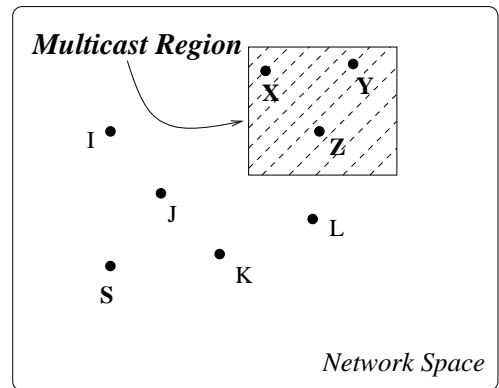


Figure 2. Multicast Region

Forwarding Zone: Again, consider node S that needs to multicast packets to a multicast region. The proposed location-based multicast algorithms use multicast flooding

with one modification. Node S defines (implicitly or explicitly) a “Forwarding Zone” for the multicast data packet. A node forwards the multicast packet *only if* it belongs to the forwarding zone (unlike the multicast flooding algorithm in Section 3.1). Forwarding zone defined here for multicasting is similar to that defined for unicast routing in [15].

To increase the probability that a data packet will reach all members in the multicast group, the forwarding zone should include the *multicast region* (described above). Additionally, the forwarding zone may also include other areas around the multicast region. When the multicast region does not include the source node S, a path from S to multicast group members must include hosts outside the multicast region. Therefore, additional region must be included in the forwarding zone, so that node S and other nodes in the multicast region both belong to the forwarding zone (for instance, as shown in Figure 3(a)). To be a useful multicast protocol, it is necessary to achieve an acceptable accuracy of multicast delivery. Note that accuracy of the protocol can be increased by increasing the size of the forwarding zone (for instance, see Figure 3(b)). However, data delivery overhead also increases with the size of the forwarding zone. Thus, there exists a trade-off between accuracy of multicast delivery and the overhead of multicast delivery.

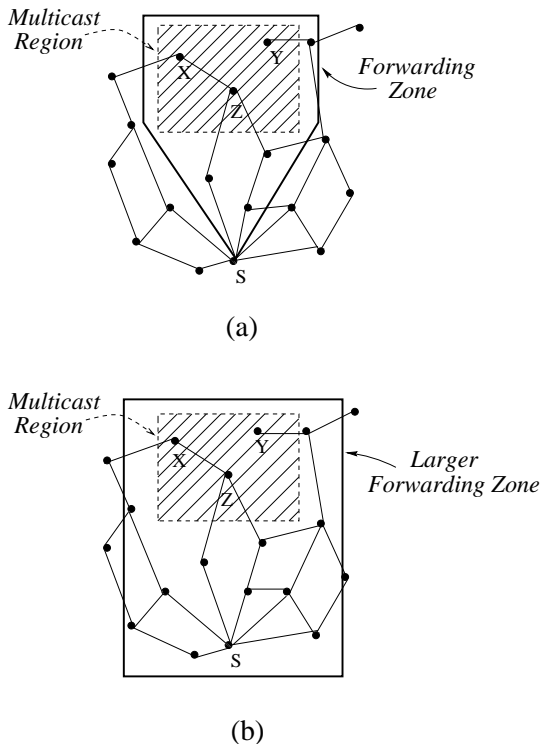


Figure 3. Forwarding Zone: An edge between two nodes means that they are neighbors

3.3 Determining Membership of the Forwarding Zone

As noted above, the proposed location-based multicast algorithms are essentially identical to multicast flooding, with the modification that a node which is not in the forwarding zone does not forward a multicast packet to its neighbors. Thus, implementing location-based multicast schemes requires that a node be able to determine if it is in the forwarding zone for a particular multicast packet – two algorithms presented here differ in the manner in which this determination is made. These algorithms are based on similar algorithms proposed in [15] for unicast routing.


Location-Based Multicast Scheme 1

Our first scheme uses a forwarding zone that is rectangular in shape (refer to Figure 4). In our location-based multicast algorithm 1, we define the forwarding zone to be the smallest rectangle that includes current location of sender S and the multicast region (the closed polygon region defined previously), such that the sides of the rectangle are parallel to the X(horizontal) and Y(vertical) axes. In Figure 4(a), the multicast region is the rectangle whose corners are O, P, B and Q, and the forwarding zone is the rectangle whose corners are S, A, B and C. Whereas in Figure 4(b), the forwarding zone is identical to the multicast region, as S is within the rectangular multicast region.


The sender node S can thus determine the four corners of the forwarding zone. Node S includes their coordinates in a multicast packet transmitted when initiating the multicast delivery. When a node receives the multicast packet, it simply discards the packet if the node is not within the rectangle specified by the four corners included in the packet. For instance, in Figure 4(a), if node I receives the multicast data packet from another node, node I forwards the packet to its neighbors, because I determines that it is within the rectangular forwarding zone. However, when node J receives the multicast data packet, node J discards the packet, as J is not within the forwarding zone.

Size of the forwarding zone: Note that the size of a rectangular forwarding zone above is dependent on (i) size of the multicast region and (ii) location of the sender. To provide additional control on the size of the forwarding zone, we define a parameter δ , which can be used to extend the forwarding zone. When δ is positive, the rectangular forwarding zone is extended in positive and negative X and Y directions by δ (thus each side increases by 2δ). For instance, let us consider the case in Figure 4(b). Let us assume a 300 unit x 300 unit square multicast region, such that the sender S is within the multicast region. In this case, the forwarding zone is identical to the multicast region, when δ is

set to 0. However, when we use $\delta = 100$ units, the size of the forwarding zone will be larger (500 unit x 500 unit square region). In our simulations, for the purpose of performance evaluation, we use δ in the range of 0 to 150 units.

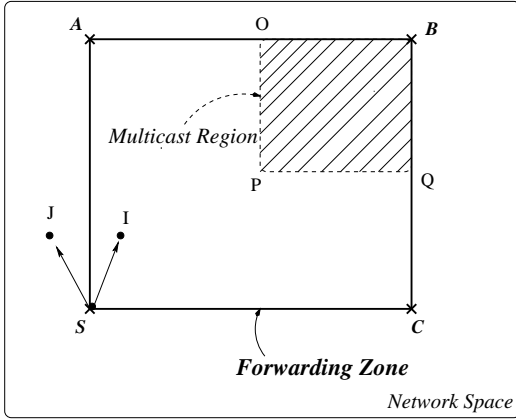

(a) Source node outside the multicast region

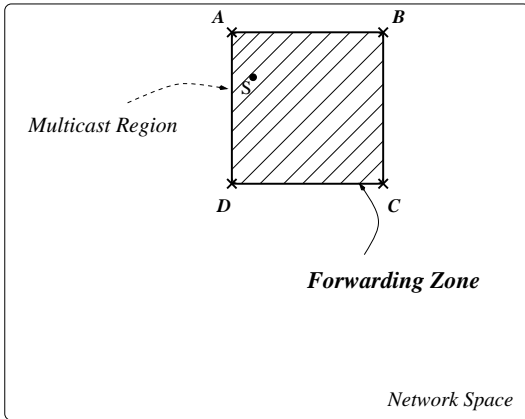

(b) Source node within the multicast region

Figure 4. Location-Based Multicast scheme 1

Location-Based Multicast Scheme 2

In the location-based multicast scheme 1 described above, the sender S explicitly specifies the *forwarding zone* in its multicast data packet. In scheme 2, without including the forwarding zone explicitly, node S includes three pieces of information with its multicast packet:

- The multicast region specification.
- The location of the geometrical center, (X_c, Y_c) , of the multicast region. Distance of any node Z from

(X_c, Y_c) will be denoted as $DIST_z$ in the rest of this discussion.

- The coordinates of sender S, (X_s, Y_s) .

When a node I receives the multicast packet from node S, I determines if it belongs to the multicast region. If node I is in multicast region, it accepts the multicast packet⁴. Then, node I calculates its distance from location (X_c, Y_c) , denoted as $DIST_i$, and:

- For some parameter δ , if $DIST_s + \delta \geq DIST_i$, then node I forwards the packet to its neighbors. Before forwarding the multicast packet, node I replaces the (X_s, Y_s) coordinates received in the multicast packet by its own coordinates (X_i, Y_i) .
- Else $DIST_s + \delta < DIST_i$. In this case, node I sees whether or not sender S is within the multicast region. If S is in the multicast region, then node I forwards the packet to its neighbors. Otherwise, I discards the packet.


When some node J receives the multicast data packet (originated by sender S) from node I, it applies a criteria similar to above. Thus, node J forwards a multicast packet delivered by I (originated by S), if J is “at most δ farther” from (X_c, Y_c) than node I. Node J also forwards the packet in the case when node I is in the multicast region, even if J is not closer to (X_c, Y_c) than I. For the purpose of performance evaluation, we use δ in the range of 0 to 150 units in the next section.

Figure 5 illustrates the difference between the two location-based multicast schemes. Consider Figure 5(a) for scheme 1 (assume $\delta = 0$): When nodes I and K receive the multicast packet (originated by sender S), they forward the multicast packet, as both I and K are within the rectangular forwarding zone. On the other hand, when node N receives the packet, it discards the packet, as N is outside the forwarding zone. Now consider Figure 5(b) for scheme 2 (assume $\delta = 0$): When nodes N and I receive the multicast data packet from node S, both forward the packet to their neighbors, because N and I are both closer to (X_c, Y_c) than node S. On the other hand, when node K receives the packet from node I, node K discards the packet, as K is farther from (X_c, Y_c) than I. Observe that nodes N and K take different actions when using the two location-based multicast schemes.


4 Performance Evaluation

To evaluate our schemes, we performed simulations using modified version of a network simulator, MaRS (Mary-

⁴This test may be modified to see whether node I is in the multicast region, or was in the multicast region *recently*.

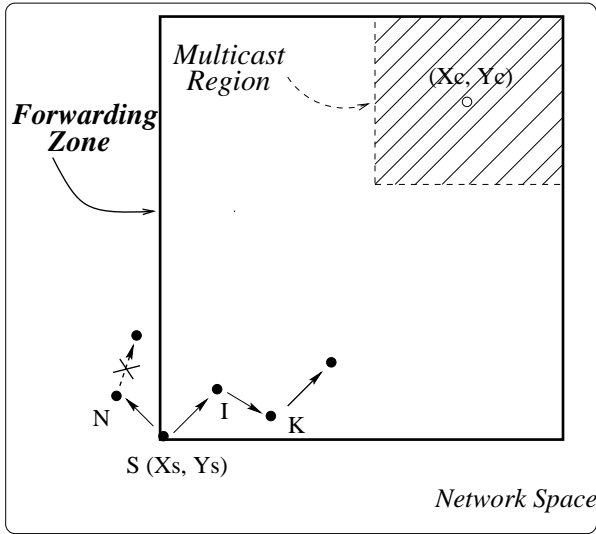

(a) Location-Based Multicast Scheme 1

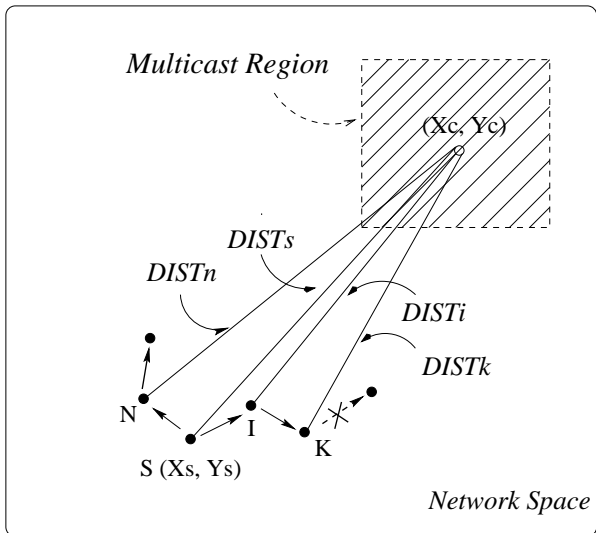

(b) Location-Based Multicast Scheme 2

Figure 5. Comparison of the two Location-Based Multicast Schemes

land Routing Simulator) [4]. MaRS is a discrete-event simulator built to provide a flexible platform for the evaluation and comparison of network routing algorithms. Three protocols were simulated – multicast flooding, location-based multicast scheme 1 and scheme 2. We studied several cases by varying the size of forwarding zone and transmission range of each node.

4.1 Simulation Model

Number of nodes in the network was chosen to be 30. The nodes in the mobile ad hoc network are confined to a 1000 unit x 1000 unit square region. Initial locations (X and Y coordinates) of the nodes are obtained using a uniform distribution. We assume that a node knows its current location accurately. Also, we assume that each node moves continuously, without pausing at any location. Each node moves with an *average* speed v . The actual speed is uniformly distributed in the range $v - \alpha$ and $v + \alpha$ units/second, where, we use $\alpha = 2.5$. In our preliminary evaluation, we only consider average speed (v) of 2.5 units/sec.

Each node makes several “moves” during the simulation. A node does *not* pause between moves. During a given move, a node travels distance d , where d is exponentially distributed with mean 20. The direction of movement for a given move is chosen randomly. For each such move, for a given average speed v , the actual speed of movement is chosen uniformly distributed between $[v - \alpha, v + \alpha]$. If during a move (over chosen distance d), a node “hits” a wall of the 1000x1000 region, the node bounces and continues to move after reflection, for the remaining portion of distance d .

Two mobile hosts are considered disconnected if they are outside each other’s transmission range. All nodes have the same transmission range. For the simulations, transmission range values of 200, 250, 300 and 400 units were used. All wireless links have the same bandwidth, 100 Kbytes per second. Each simulation run simulated 1000 seconds of execution. For the simulation, a sender is chosen randomly and a multicast region is predefined. We assume that the multicast region is a 300 unit x 300 unit square region with both X and Y coordinates in the range between 500.00 and 800.00. The source performs one multicast per second, which means that 1000 multicasts have been done in each simulation run.

In our simulations, we do not model the delays that may be introduced when multiple nodes attempt to transmit simultaneously. Transmission errors and congestion are also not considered.

4.2 Simulation Results


In the following, the term “multicast packets” is used to refer to the multicast data packets *received* by the nodes – the number of multicast packets received by nodes is different from number of multicast packets *sent*, because a single broadcast of a multicast data packet by some node is received by *all* its neighbors. We measure two parameters:

- *Accuracy of multicast delivery*: As explained in Section 3.2, accuracy of multicast delivery is calculated as ratio of the number of multicast group members which actually receive the multicast packets, and the number of group members which were supposed to receive the packets (i.e., the number of nodes that were in the multicast region when the multicast was initiated.) In our simulation results, the accuracy of multicast delivery is an average over 1000 multicasts.
- *Total number of multicast packets received by nodes per multicast*: This is defined as the total number of multicast packets delivered to all the nodes combined, during each multicast. Note that when a node broadcasts a packet to its neighbors, the packet is delivered to all its neighbors (and counted as many times in this statistic). The number of multicast packets received by the nodes per multicast is a measure of the overhead of multicast packet delivery.


We compare the results from location-based multicast schemes 1 and 2 with those from the multicast flooding algorithm.

Accuracy of multicast delivery for the location-based multicast scheme 1 is depicted in Figure 6(a) as a function of transmission range of each node. Figure 6(a) also shows how the size of forwarding zone, i.e., varying the value of δ in the range of 0 to 150 units, affects accuracy. Generally, the accuracy of scheme 1 increases with increasing δ . Note that, when δ is equal to 150, accuracy of multicast delivery for scheme 1 is almost the same as that for multicast flooding. In some cases, accuracy of multicast flooding itself is not too good. With a smaller transmission range, number of neighbors for each node decreases. Therefore, a single broadcast of multicast packet results in less nodes receiving the packet. This factor contributes to a decrease in probability that the packet reaches multicast group members.

Figure 6(b) plots the total number of multicast packets received by the nodes per multicast as a function of transmission range of each node. Observe that the number of multicast packets received is consistently lower for the location-based multicast scheme 1 as compared to multicast flooding. As the transmission range of nodes is increased, number of multicast packets received per multicast increases for all schemes. However, scheme 1 provides a

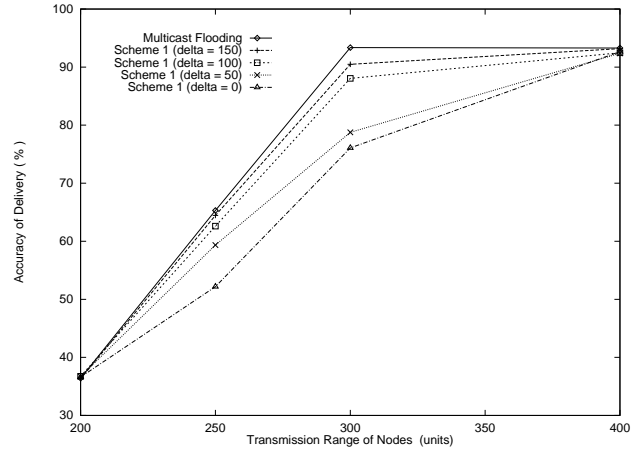

(a) Accuracy of Multicast Delivery

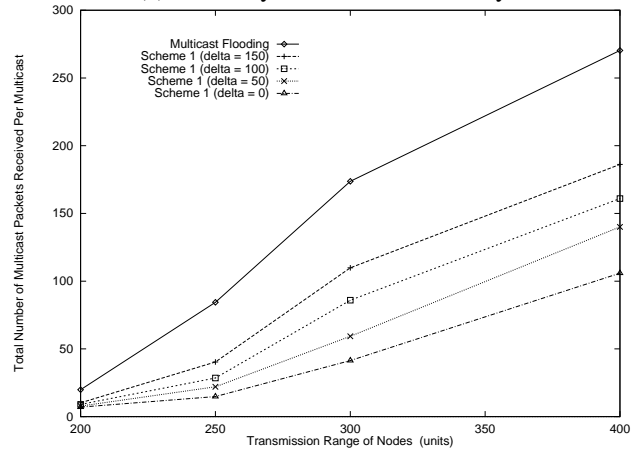

(b) Total Number of Multicast Packets Received Per Multicast

Figure 6. Location-Based Multicast Scheme 1 (For 30 nodes, and Average speed 2.5 units/sec) : (a) Delivery accuracy versus Transmission range, (b) Total number of multicast packets received per multicast versus Transmission range

lower rate of increase than multicast flooding. This is because, with scheme 1, number of multicast packets transmitted is reduced by limiting data broadcasting to a smaller forwarding zone.

Figure 7 plots the results for scheme 2. Figure 7(a) shows that the location-based multicast scheme 2 is generally more accurate than scheme 1 (See Figure 6(a)). However, note that the accuracy for schemes 1 and 2 both is comparable with that of the multicast flooding, when $\delta = 150$ units. Similar to scheme 1, amount of multicast data delivery overhead for the multicast flooding algorithm increases much more rapidly than scheme 2, when transmission range is increased. The effect of varying the size of forwarding zone is also shown in Figure 7.

5 Optimizations of Location-Based Multicast

A number of optimizations are possible to improve performance of the basic location-based multicast protocols⁵.

5.1 Alternative Definitions of Forwarding Zone


In this paper, we consider two ways of defining a *forwarding zone*. Several other alternatives may be considered. For instance, in the scheme 1, the sides of the rectangle are always parallel to the X and Y axes. It is possible to remove this restriction when defining the rectangular region. For example, one side of the rectangle may be made parallel to the line connecting the location of source node S to the geometric center of the multicast region (see Figure 8).

5.2 Forwarding Zone Adaptation


In our location-based multicast scheme 1, the forwarding zone is specified explicitly by the source S, and it is not modified by any intermediate nodes. By adapting the forwarding zone at any intermediate node I, the performance of the scheme 1 can be improved. For example, in Figure 9(a), when node I receives the multicast data packet from the source S and forwards the packet to its neighbors because I is within the forwarding zone Z (defined by S), it can replace Z by an adapted forwarding zone Z' before forwarding the packet. By applying the same reasoning when node J receives the data packet from node I, the forwarding zone can be again adapted.

Generalizing the above idea, although a rectangular shape is used for the forwarding zone in location-based multicast scheme 1, any other form may also be used. For instance, Figure 9(b) shows the case when the forwarding zone is defined as a cone rooted at node S, such that angle

⁵ Most optimization approaches proposed for the LAR in [15, 17] can also be applied here.

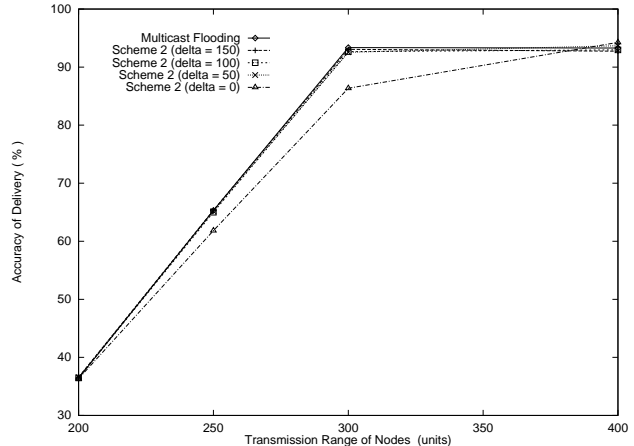

(a) Accuracy of Multicast Delivery

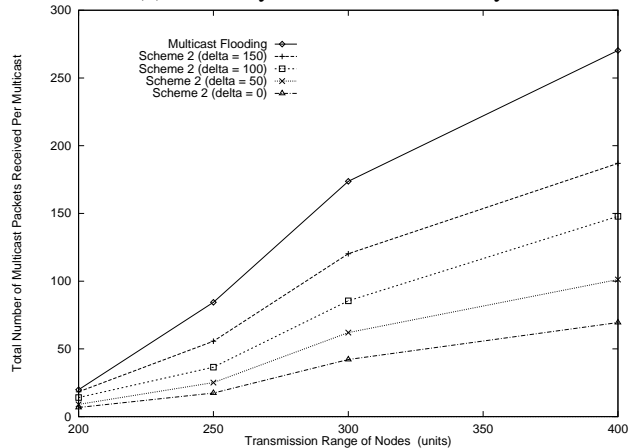

(b) Total Number of Multicast Packets Received Per Multicast

Figure 7. Location-Based Multicast Scheme 2 (For 30 nodes, and Average speed 2.5 units/sec) : (a) Delivery accuracy versus Transmission range, (b) Total number of multicast packets received per multicast versus Transmission range

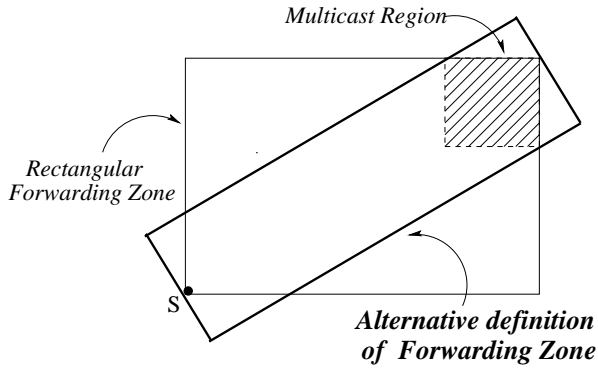



Figure 8. An alternative for Forwarding Zone (Location-Based Multicast scheme 1)

made by the cone is large enough to include the forwarding zone. Similar to adaptation of the rectangular forwarding zone in Figure 9(a), the cone-shaped forwarding zone may also be adapted as shown in Figure 9(b).


5.3 Use of Directed Antennas

The basic location-based multicast schemes can be improved upon by using *directed antennas*. (Note that, in general, mobile hosts in the MANET are assumed to have *omnidirectional* antennas for wireless communication [9].)

Let us consider the Figure 10, in which node S needs to send multicast data packets to all nodes in the multicast region. Let us also assume that location-based multicast scheme 1 is used for this data delivery with omnidirectional antennas. In scheme 1, based on the viewpoint of S, the forwarding zone is defined as the rectangle in which only node S, A, B, D and F are included. Nodes C and E do not need to receive any data packets, because they are both outside the forwarding zone. However, due to the broadcast transmission properties of wireless networks, node C receives a multicast data packet from node S whose transmission range covers C as well as A. Similarly, the multicast packet will be forwarded to node E, via node A, unnecessarily. (In fact, when node A forwards the packet, all its neighbors B, C, E, and S, will receive the packet.) This inherent limitation can be mitigated by using directed antennas whose radiation pattern is not omnidirectional. Again, assume that node S having a directed antenna initiates a multicast data delivery for location-based multicast group members. Based on the forwarding zone, multicast data packets may only be directed at a small group of mobile nodes. Therefore, in this scenario, node C does not receive the packet from S even though C is a neighbor of S. When node A forwards the multicast packet (originated by node S), it applies a sim-

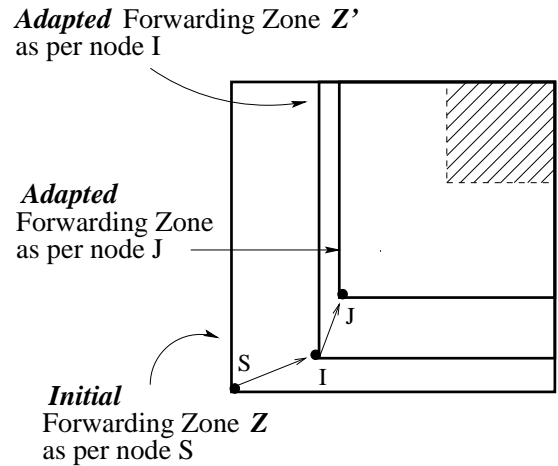

(a) Adaptation of *Rectangular Shaped* Forwarding Zone

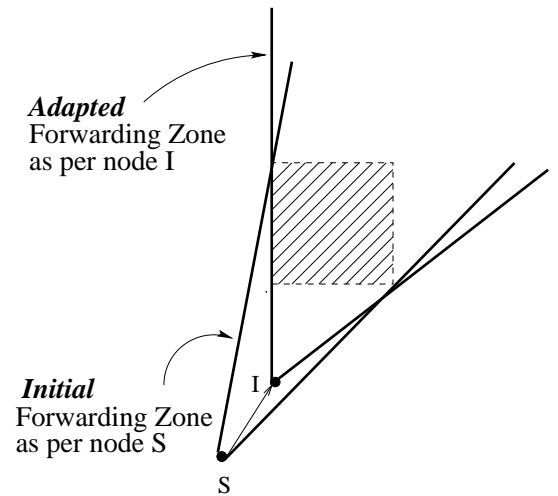

(b) Adaptation of *Cone-Shaped* Forwarding Zone

Figure 9. Adaptation of Forwarding Zone for Location-Based Multicast scheme 1

ilar criteria. Continuing in this fashion, the location-based multicast protocols with directed antennas may decrease the cost of ad hoc multicast.

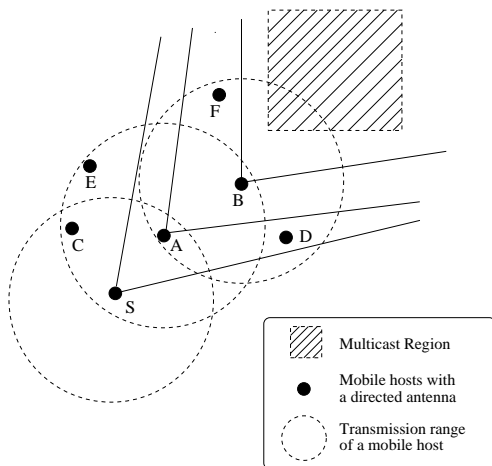


Figure 10. Directed Antenna Utilization for Location-Based Multicast

6 Conclusion

This paper focuses on the problem of *geocasting* – broadcasting to every node in a specified geographical area – in mobile ad hoc environments. In this paper, the specified geographical area is called the *multicast region*, and the set of nodes that reside within the specified multicast region is called a *location-based multicast group*. We propose two location-based multicast algorithms. The proposed algorithms limit the forwarding space for a multicast packet to the so-called *forwarding zone*. Simulation results indicate that proposed algorithms result in lower message delivery overhead, as compared to multicast flooding. As simulation results show, while reducing the message overhead significantly, it is possible to achieve accuracy of multicast delivery comparable with multicast flooding. We also discuss how the basic location-based multicast schemes may be optimized to improve performance. Evaluation of these optimizations is a subject of future work. Also, similar to traditional multicast algorithms, it is possible to implement a location-based multicast by maintaining a multicast tree. A comparison between the algorithms presented in this paper and the alternative approach of maintaining a multicast tree is also a topic for further work.

Acknowledgements

We thank the referees for their helpful comments.

References

- [1] Iowa State University GPS page. Web site at <http://www.cnde.iastate.edu/gps.html>.
- [2] Mobile ad-hoc networks (Manet) charter. Web site at <http://www.ietf.org/html.charters/manet-charter.html>.
- [3] I. F. Akyildiz, S. M. Joseph, and Y.-B. Lin. Movement-based location update and selective paging for PCS networks. *IEEE/ACM Trans. on Networking*, 4(4):94–104, 1996.
- [4] C. Alaettinoglu and et al. MaRS programmer’s manual - version 1.0. Technical Report TR 91-107, The University of Maryland, July 1991.
- [5] T. Ballardie. Core based trees (CBT) multicast routing architecture. In *RFC 2201*, September 1997.
- [6] S. Basagni and et al. A distance routing effect algorithm for mobility (DREAM). In *ACM/IEEE Int. Conf. on Mobile Computing and Networking (MobiCom '98)*, October 1998.
- [7] Bommaiah, McAuley, Talpade, and Liu. AMRoute: Adhoc multicast routing protocol (Internet-Draft), August 1998.
- [8] C. Chiang, M. Gerla, and L. Zhang. Shared tree wireless network multicast. In *Proc. of 6th Int. Conf. on Computer Communications and Networks*, pages 28–33, September 1997.
- [9] S. Corson and J. Macker. Mobile ad hoc networking (MANET): Routing protocol performance issues and evaluation considerations (Internet-Draft), October 1998.
- [10] S. Deering and et al. Protocol independent multicast-sparse mode (PIM-SM): Motivation and architecture (Internet-Draft), October 1996.
- [11] S. Deering and et al. Protocol independent multicast version 2-dense mode specification (Internet-Draft), May 1997.
- [12] C. Huitema. *Routing in the Internet*. Prentice Hall, 1995.
- [13] T. Imielinski and J. C. Navas. Geographic addressing, routing, and resource discovery with the global positioning system. *Communications of the ACM Journal*, 1997.
- [14] L. Ji and M. S. Corson. LAM: Lightweight adaptive multicast protocol (Internet-Draft), August 1998.
- [15] Y.-B. Ko and N. H. Vaidya. Location-aided routing (LAR) in mobile ad hoc networks. In *ACM/IEEE Int. Conf. on Mobile Computing and Networking (MobiCom '98)*, October 1998.
- [16] Y.-B. Ko and N. H. Vaidya. Location-based multicast in mobile ad hoc networks. Technical Report 98-018, CS Dept., Texas A&M University, September 1998.
- [17] Y.-B. Ko and N. H. Vaidya. Optimizations for location-aided routing (LAR) in mobile ad hoc networks. Technical Report 98-023, CS Dept., Texas A&M University, November 1998.
- [18] Metricom Web Page. <http://www.metricom.com>.
- [19] J. C. Navas and T. Imielinski. Geocast - geographic addressing and routing. In *ACM/IEEE Int. Conf. on Mobile Computing and Networking (MobiCom '97)*, September 1997.
- [20] K. Obraczka and G. Tsudik. Multicast routing issues in ad hoc networks. In *IEEE ICUPC*, October 1998.
- [21] T. Pusateri. Distance vector multicast routing protocol (Internet-Draft), March 1998.
- [22] S. Ramanathan and M. Steenstrup. A survey of routing techniques for mobile communication networks. *ACM/Baltzer Mobile Networks and Applications*, pages 89–104, 1996.
- [23] C. Wu, Y. Tay, and C.-K. Toh. Ad hoc multicast routing protocol utilizing increasing id-numbers (AMRIS) functional specification (Internet-Draft), November 1998.